


# Brass Swing Check Valve

## FIG. 134



### Features

Max Pressure PN16  
 Max. Temperature 100°C  
 Thread Standard ISO228  
 Suitable Media Water, Oil, Gas

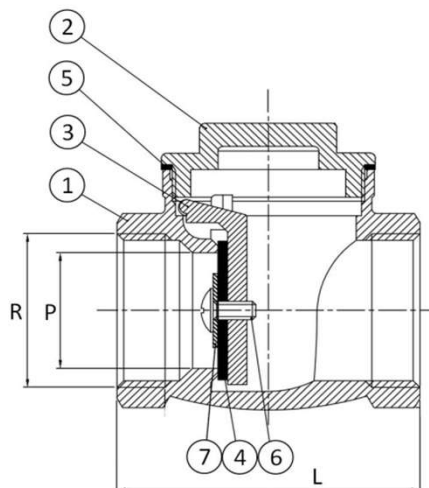

### DIMENSIONS

Dim (Inch)	DN	L	R
1/2	DN15	45	14
3/4	DN20	50	18
1	DN25	62	23
1 1/4	DN32	67	29
1 1/2	DN40	72	37
2	DN50	85	47

### MATERIALS OF MAIN PARTS

No	PARTS	MATERIALS
1	Body	Brass
2	Bonnet	Brass
3	Disc	Brass
4	Disc gasket	NBR
5	Bonnet gasket	Fiber
6	Screw	Brass
7	Washer	Stainless steel 304